


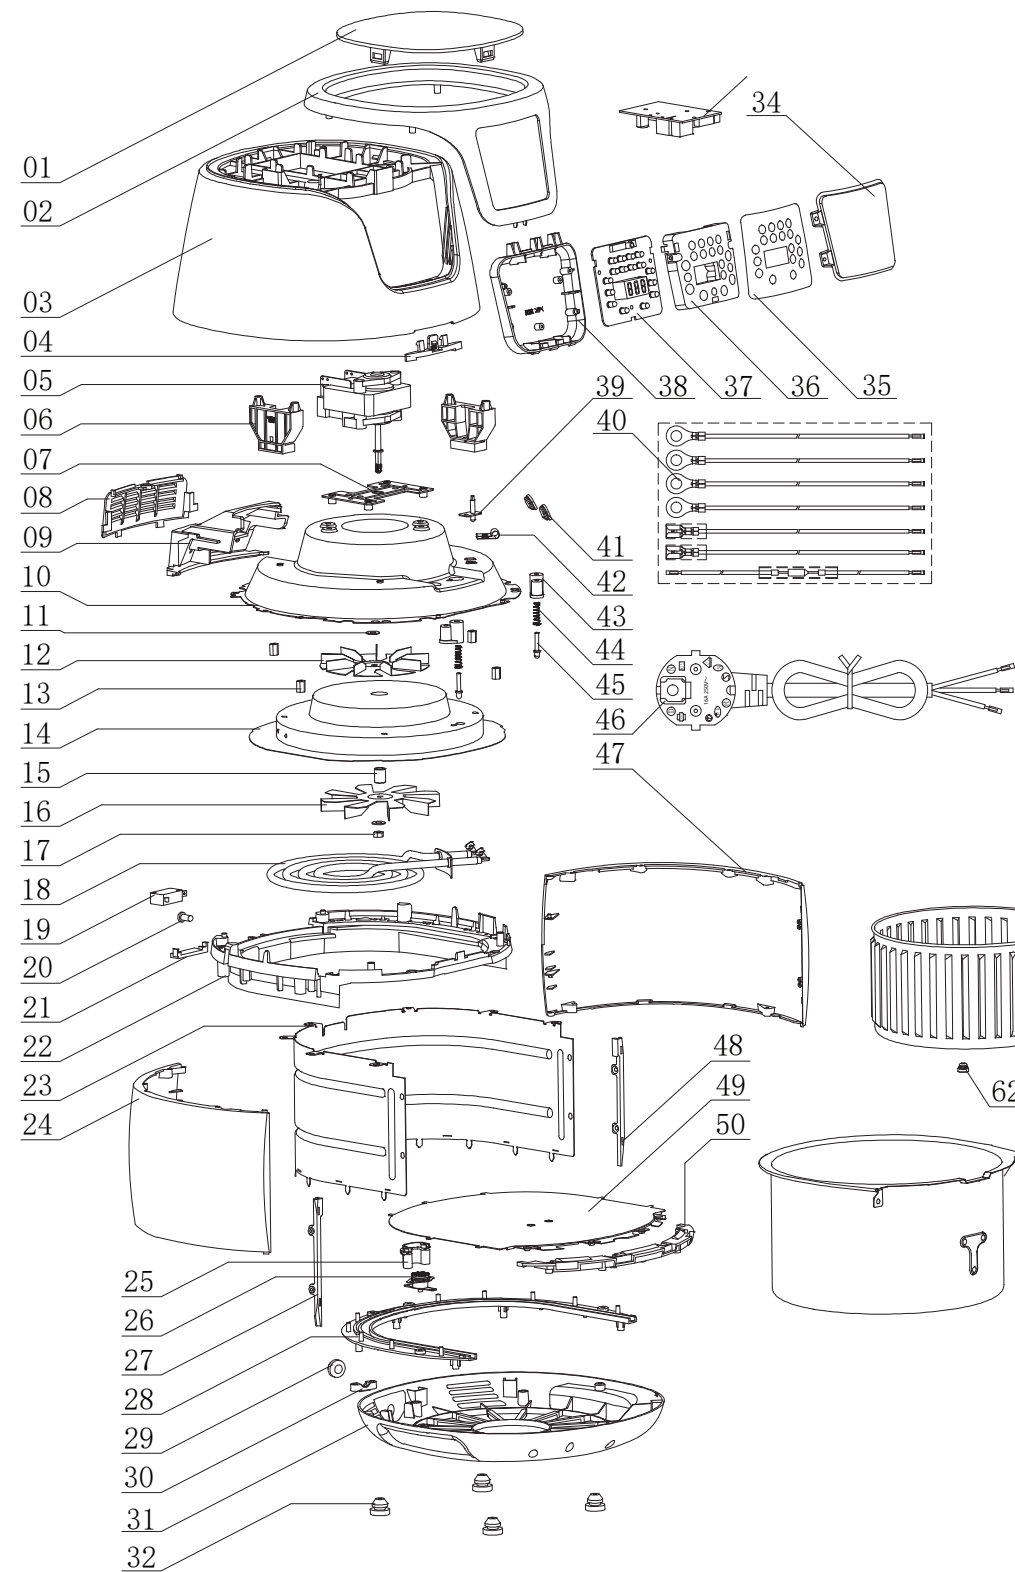

Item	Part Desc.	Specification	Material	Qty.	Remark
43	Spring sheath	PA66+15%GF		2	
44	Spring	$\phi 0.5 \times 3 \phi 4.5 \times \phi 6.0 \times 29$ P=3.0mm	65Mn	2	
45	Locking axis	$\phi 6.0 \times 26$ mm	Nickle-plated	2	
46	Power cord & Plug	VDE PLUG + H05VV-F 3G/0.75		1	
47	Left main housing	Heat-proof PP		1	
48	LEFT EDGE BANDING	PBT+20%GF		1	
49	Inner bottom-plate	T=0.4mm	Galvanized	1	
50	FRONT HEAT INSULATION RING	PBT+20%GF		1	
51	Basket	T=0.8mm	Aluminium	1	
52	Basket fixture	SUS304		1	
53	Basket bracket	PBT+20%GF		1	
54	Axis pin	$\Phi 3.3 \times 30$ (L) mm	Nickled	1	
55	Lock hook	T=2.0mm	SUS430	1	
56	Transperant cover			1	
57	Release button	ABS		1	
58	Spring	$\phi 0.9 \times \phi 7.5 \times 16.5$ P=3.0	SUS304	1	
59	Handle base	PA66+15%GF		1	
60	Handle cover	ABS		1	
61	Handle cover decorative plate	T=0.5mm	SUS430	1	
62	Plug	Hardness 45-55	Silicone	1	
63	Pan	T=0.4mm	Galvanized	1	
64	Front heat-proof plate	PBT+20%GF		1	
65	Lock hook base	T=1.2mm	Galvanized	1	
66	Front cover	Heat proof PP		1	

42	THERMOSTAT PROBE CLIP	T=0.5mm	Galvanized	1	
41	HEATING ELEMENT SEAL SILICA GEL	Hardness 45-55	Silicone	2	
40	Inner wire	3122 18# Type Fuse Tf157/158		1	
39	NTC	1332 24# L=360mm		1	
38	PCB COVER	Heat-proof PP		1	
37	PCB DIS	AC100-240V 50/60Hz (C)		1	
36	PCB COVER	Heat-proof PP		1	
35	PLATE	PC (C)		1	
34	COVER	PC		1	
33	PCB POWER	AC220-240V 50/60Hz		1	
32	FEET	Hardness 45-55	Silicone	4	
31	Bottom cover	Heat-proof PP		1	
30	Strain-relief plate	Heat-proof PP		1	
29	Power cord sheath	Hardness 45-55	Silicone	1	
28	LOWER HEAT INSULATION RING	PBT+20%GF		1	
27	RIGHT EDGE BANDING	PBT+20%GF		1	
26	THERMAL CUT-OFF	KSD301-CR 125V 250V/15A Tf130		1	
25	TC0 Bracket	PA66+30%GF		1	
24	Right main housing	Heat-proof PP		1	
23	U-SHAPED HEAT INSULATION PLATE	T=0.4mm	Galvanized	1	
22	Heat-resistant ring	PBT+20%GF		1	
21	SWITCH HEAT INSULATION SILICA GEL	Hardness 45-55	Silicone	1	
20	Micro switch cap	Hardness 45-55	Silicone	1	
19	Micro switch	KW-16 125/250V 16A UL&VDE		1	
18	Heater	AC230V 1475W 5 circles	SUS304	1	
17	Nut M5	M5 anti-thread	SUS304	1	
16	Fan	T=0.5mm	SUS430	1	
15	Axis sheath	$\Phi 5 \times \Phi 10 \times 13$ (L) mm	Nickle-plated	1	
14	Inner cover	T=0.4mm	Galvanized	1	
13	HEXAGONAL ROD	H6*M4.0 L=10mm	Nickle-plated	4	
12	Opposite fan	T=0.5mm	Galvanized	1	
11	Flat washer	$\phi 5.5 \times \phi 12 \times 0.6$ t	SUS304	2	
10	Motor cover	T=0.5mm	Galvanized	1	
09	VENTILATING DUCT	PPS		1	
08	Air outlet net	PBT+20%GF		1	
07	MOTOR MOUNTING PLATE	T=1.0mm	Galvanized	1	
06	Bracket	PA66+30%GF		2	
05	Shaded pole Motor	6020 AC220-240V 50/60Hz 25W Class155 CW		1	
04	TOP EDGE INSERT	PA66+30%GF		1	
03	Upper housing	Heat proof PP		1	
02	Cover	ABS		1	
01	TOP cover	ABS		1	
Item	Part Desc.	Specification	Material	Qty.	Remark

Air Fryer AF-32Q (TXG-DT13Q)

Factory: Tianxi Holding Group Co., Ltd
1 West 2nd Road, Hu Town, Jingyun, Lishui,
321404 Zhejiang, China